

Product introduction

Water type silence check valve is flow-line designed and pressure loss is very little;the spring accelerates the valve's closing and get silence effect;metal-to-metal seating is liable and it needs small installation space.It is often installed at the outlet of pump to prevent water-hammering,water hitting and destructive impact and backward flow induced and protect the related equipments.It is widely used in feeding/draining system,fire protection,construction,heat supplying and industry system etc..

Main technical parameters

Nominal pressure: 1.0-1.6

Nominal diameter: 40-250mm


Service:water and weak corrosive fluid

Working temperature:0-80

Flanged end: GB/T17241.6 GB9113

Inspection and test: GB/T 13927 API 598

Typical installation diagram

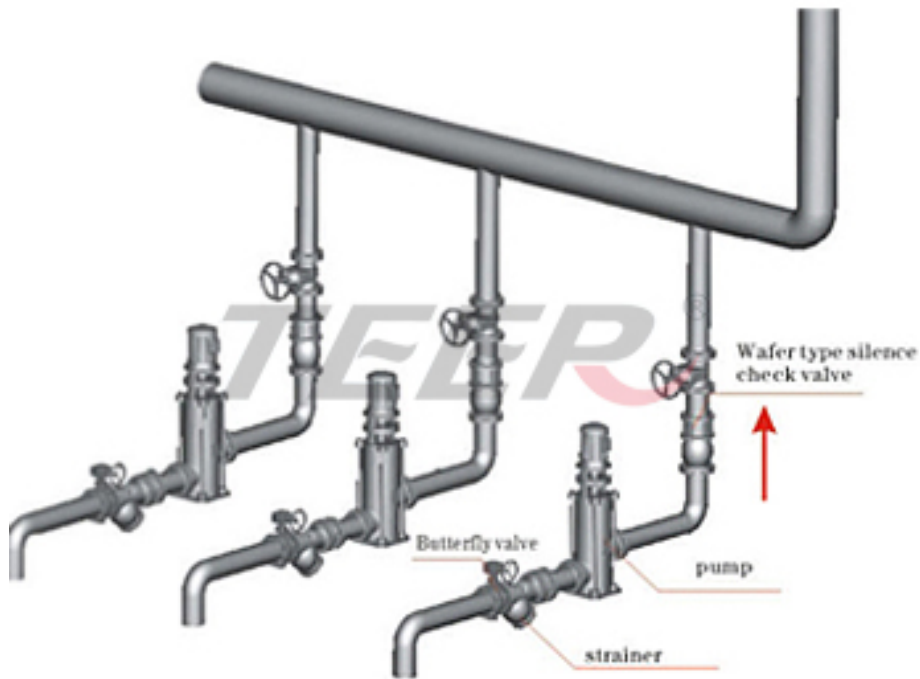

Material

part	body	disc	spring	seat
Material	Cast iron ductile cast iron, cast steel	Cast copper, stainless steel	Stainless steel	Copper, steel

Main dimensions unit:mm

DN	40	50	65	80	100	125	150	200	250
L	45	55	70	75	95	115	135	160	200
D	90	105	125	140	160	195	215	270	325

Copyright: 2006 (C) China Zhejiang Teer Valve Co., Ltd.

Dong-ou Industrial Zone, Wenzhou, Zhejiang, China, 325100

Int'l trade: Tel:(86)577-57999777 67995111 67995115 67995116 Fax:57999888 Local sales: Tel:57989999

Fax:57989988

[HTTP://www.chinateer.com](http://www.chinateer.com) E-mail: trade@chinateer.com